

www.KossUPS.com.my

FORMULA80 800VA

- For Office and Multimedia PC's
- Point of Sales Terminal
- Other Office Equipment

Line Interactive UPS

- Compact size
- AVR for voltage stabilization
- Auto restart while AC is recovering
- Simulated sine wave
- Cold start function
- Generator compatible
- Excellent microprocessor control guarantees high reliability












UK USA

Korea

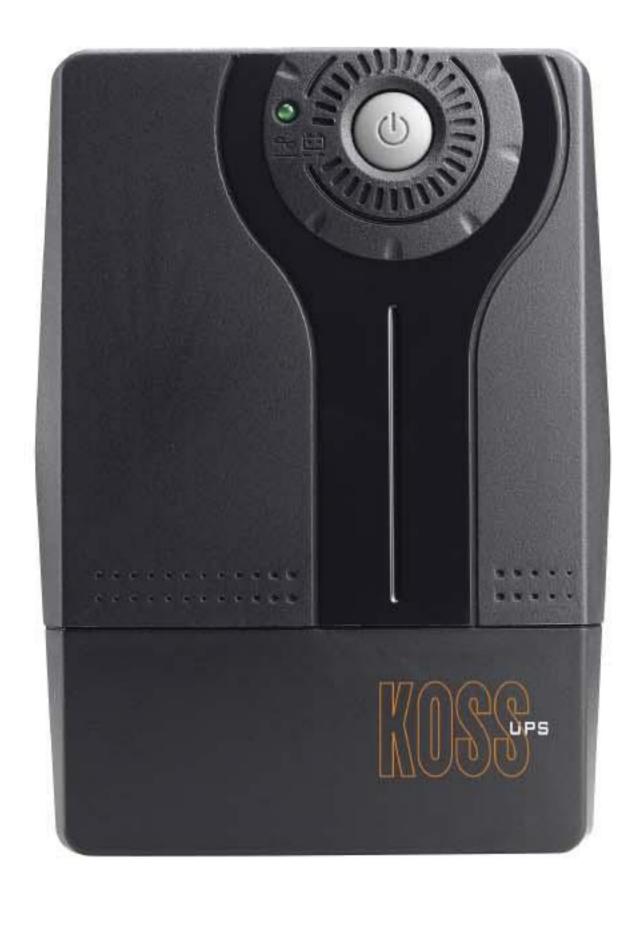



Line Interactive UPS FORMULLA80

AV008

- Compact size
- AVR for voltage stabilization
- Auto restart while AC is recovering
- Simulated sine wave
- Cold start function
- Generator compatible
- Excellent microprocessor control guarantees high reliability





MODEL	FORMULA80
CAPACITY	800 VA
INPUT	
Voltage	230 VAC
Voltage Range	160-280 VAC
Frequency Range	60/50 Hz (auto sensing)
OUTPUT	
AC Voltage Regulation (Batt. Mode)	± 10%
Frequency Range (Batt. Mode)	50 Hz or 60 Hz ± 1 Hz
Transfer Time	Typical 2-6 ms
Waveform (Batt. Mode)	Simulated Sinewave
BATTERY	
Battery Type & Number	12V 7Ah x 1
Typical Recharge Time	4 hours recover to 90% capacity
PROTECTION	
Full Protection	Overload, discharge, and overcharge protection
INDICATORS	
AC Mode	Green lighting
Battery Mode	Green Flashing
ALARM	
Battery Mode	Sounding every 10 seconds
Low Battery	Sounding every second
Overload	Sounding every 0.5 second
Fault	Continuously sounding
PHYSICAL	
Dimension, D x W x H (mm)	279 x 101 x 142
Net Weight (kgs)	4.9
ENVIRONMENT	
Humidity	0-90 % RH @ 0- 40°C (non-condensing)
Noise Level	Less than 40dB

Product specifications are subject to change without further notice

www.KossUPS.com.my























